


# AOM703 to AOM713WP

## Swap out instructions

Remove the **AOM703** monitor panel and junction box from the existing system. The intermediate harness and power harness can be used with the new monitor system. The main camera cable will remain.

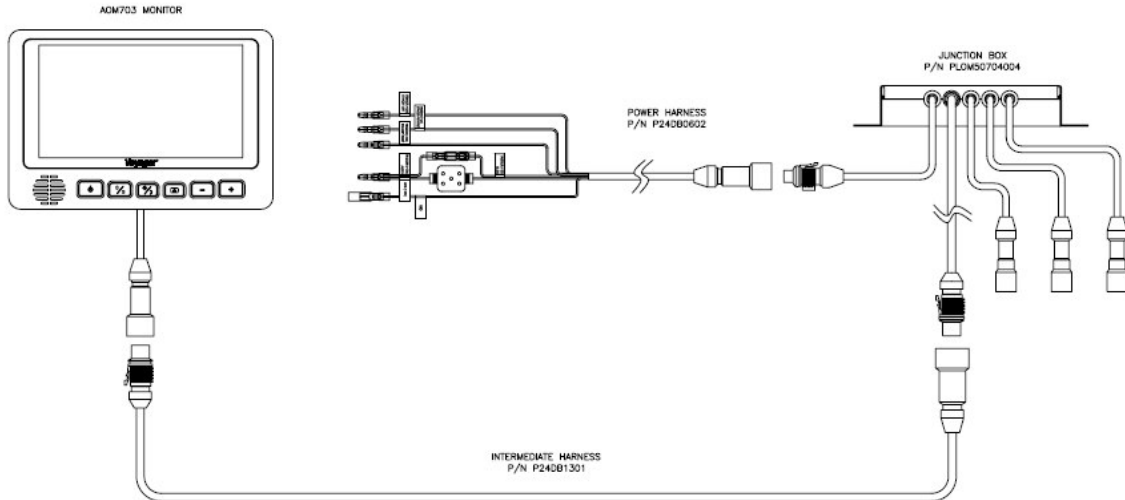

Install the **AOM713WP** monitor panel and junction box to the intermediate harness and power harness from the existing system. Your camera cable will connect into the **CA1**, **CA2**, or **CA3** inputs.

